

2024 年 6 月 3 日

TS-SPE100

ツ バ 付 ス リ ー ブ

仕 様 書

K A N T O

関東器材工業株式会社


1. 適用範囲

本仕様書は、ツバ付スリーブ(TS)、ツバ付スリーブ 勾配対応(TSK)に適用します。

2. 仕様

ツバ付スリーブの仕様を以下に示します。

2-1. ツバ付スリーブ(TS-64200・TS-69200・TS-74250・TS-79250)

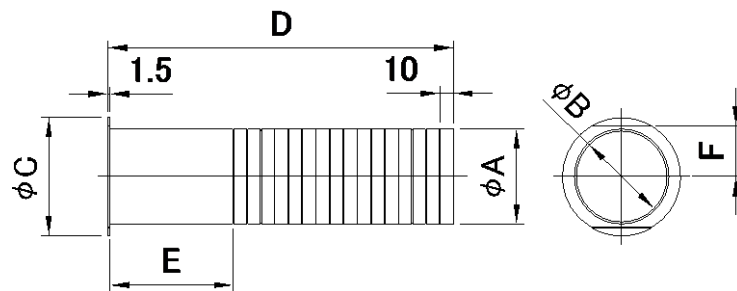


単位:mm

型番	φA(外径)	φB(内径)	C	D	E	F	コアドリル径	材質
TS-64200	φ64	φ61	φ80	200	60	35	φ65	PE
TS-69200	φ69	φ67	φ86	200	80	37	φ70	
TS-74250	φ74	φ71.5	φ92	250	90	40	φ75	
TS-79250	φ79	φ76.5	φ99	250	90	42.5	φ80	

■色調:アイボリー

2-2. ツバ付スリーブ 勾配対応 (TSK-64250・TSK-69250・TSK-74250)

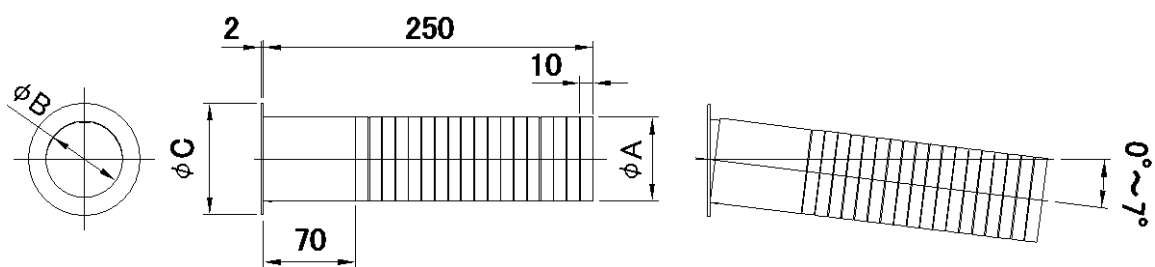


単位:mm

型番	φA(外径)	φB(内径)	C	コアドリル径	排水勾配 対応角度	材質
TSK-64250	φ64	φ58	φ85	φ65	0° ~7°	PE
TSK-69250	φ69	φ63	φ90	φ70	0° ~7°	
TSK-74250	φ74	φ67.8	φ92	φ75	0° ~7°	

■色調:アイボリー


3. 注意事項

- 接合部・嵌合部・貫通部には、必ずコーキング処理やパテ埋めなどを施し、防水処理を行ってください。

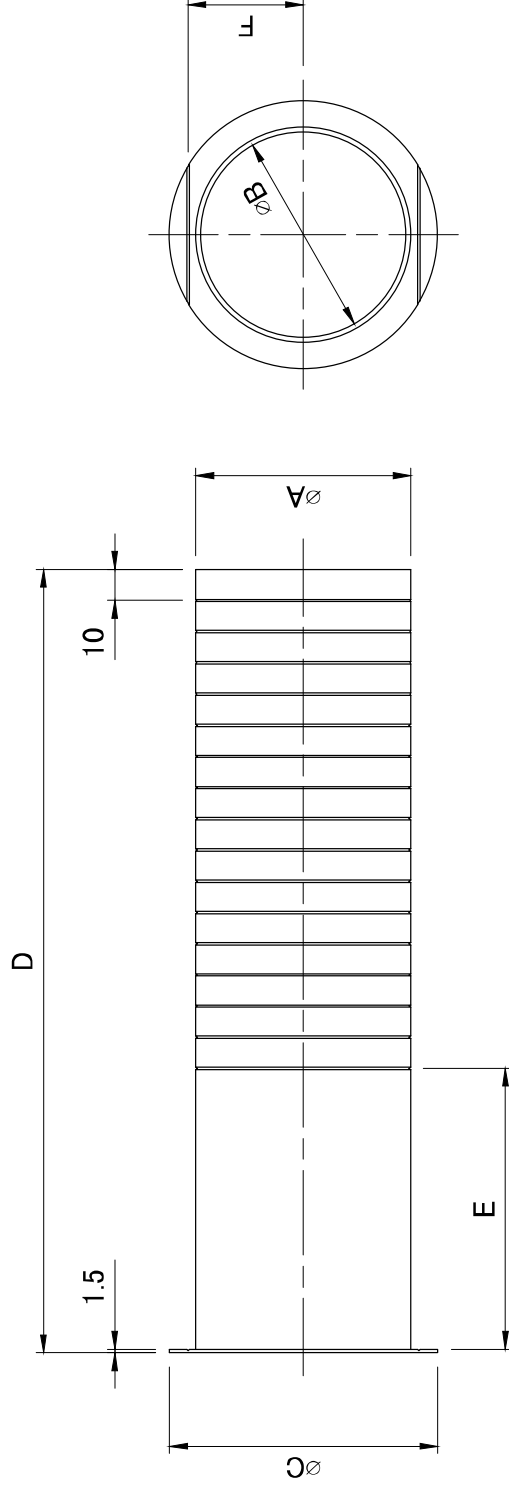

記号		A	B	C	D	E	F	コアドリル径
型番								
TS-64200		ø64	ø61	ø80	200	60	35	ø65
TS-69200		ø69	ø67	ø86	200	80	37	ø70
TS-74250		ø74	ø71.5	ø92	250	90	40	ø75
TS-79250		ø79	ø76.5	ø99	250	90	42.5	ø80

— 番号	— 名 称	PE	材 質	アイボリー 色 調	1 数量	備 考					
日付		2021.02.09		型番		TS-64200・TS-69200 TS-74250・TS-79250		型名		ツバ付スリーブ	
尺度		Free									
単位		mm									

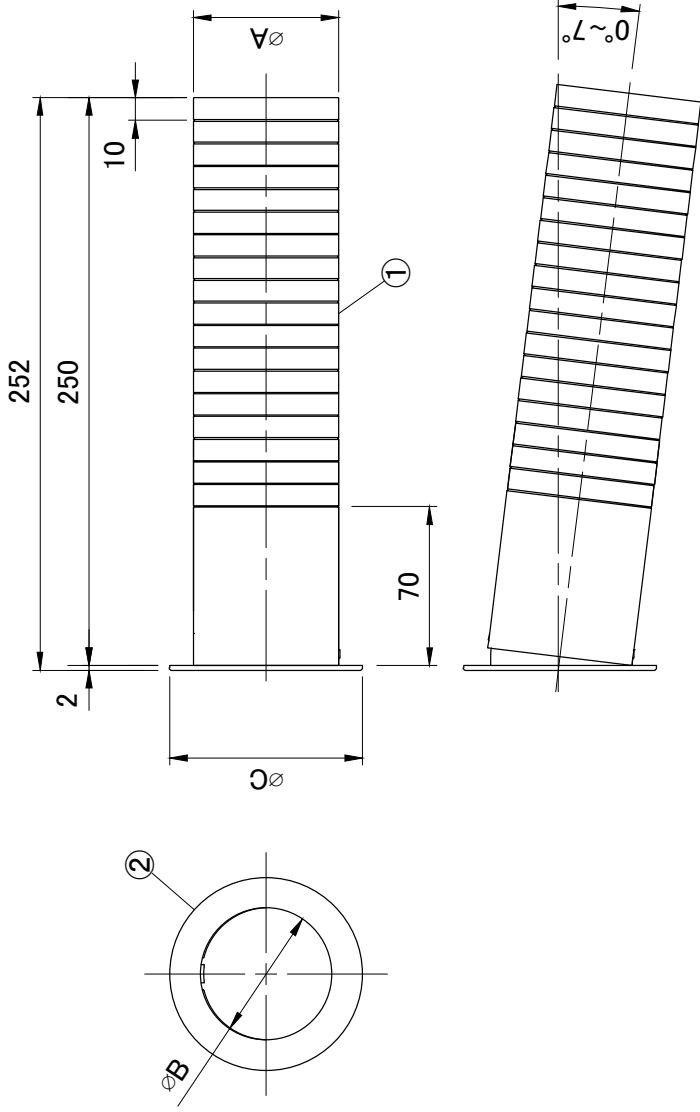

記号 型番	A	B	C	コアドリル径	排水勾配 対応角度
TSK-64250	Ø64	Ø58	Ø85	Ø65	0°~7°
TSK-69250	Ø69	Ø63	Ø90	Ø70	0°~7°
TSK-74250	Ø74	Ø67.8	Ø92	Ø75	0°~7°

		日付		2022.04.19		型番		TSK-64250・TSK-69250・TSK-74250		型名		ツバ付スリーブ (勾配対応)	
		尺度		Free		単位		mm					